


Sidepower Elektrische Boegschroeven



Model	SE080/185T	SE100/185T	SE120/215T	SE150/215T	SE130/250T
Stuwkracht (kgf)	80	100	120	150	130
Tunneldiameter (mm)	185	185	215	215	250
Aandrijfvermogen (kW)	4,4	6,3	6,4	6,6	6,5
Voltage (VDC)	24	24	24	24	24
Zekeringwaarde (A)	250	325	325	400	325
Min. accu cap. (CCA)	400	400	400	560	500
Gewicht (kg)	20	31	34	38	37

Sidepower Elektrische Boegschroeven

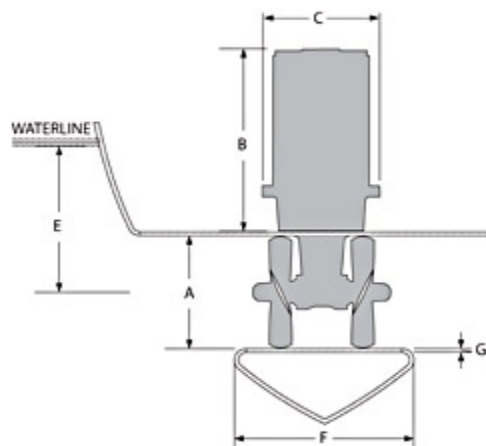


Model	SE080/185T	SE100/185T	SE120/215T	SE150/215T	SE130/250T
A (mm)	185	185	215	215	250
B (mm)	352	389	389	398	398
C (mm)	208	245	245	254	254
E min. (mm)	200	200	215	215	230
F (mm)	170	170	280	280	285
F recommended (mm)	340	340	560	560	560
G min. (mm)	6	6	6	6	7
G max. (mm)	8	8	8	8	10

Sidepower Elektrische Boegschroeven



Model	SE170/250TC	SE210/250TC	SE240/300TC
Stuwkracht (kgf)	170	210	240
Tunneldiameter (mm)	250	250	300
Aandrijfvermogen (kW)	8	10	11,4
Voltage (VDC)	24	24	24
Zekeringwaarde (A)	400	500	500
Min. accu cap. (CCA)	550	650	700
Gewicht (kg)	44	68	70

Sidepower Elektrische Boegschroeven

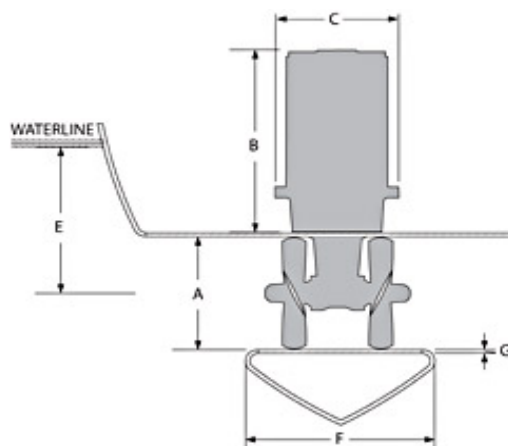

Model	SE170/250TC	SE210/250TC	SE240/300TC
A (mm)	250	250	300
B (mm)	421	478	490
C (mm)	230	260	266
E min. (mm)	250	250	300
F (mm)	300	300	296
F recommended (mm)	600	600	600
G min. (mm)	7	7	10
G max. (mm)	10	10	13